

**CAM-221, CAM-241, CAM-441 SHARP BT-241**

CAMCORDER



BATTERY PROFILE

- CAM-221** 7.2V, 1100MAH  
*(BLACK)*
- CAM-241** 7.2V, 1100MAH  
*(GREY)*
- CAM-441** 7.2V, 2200MAH  
*(BLACK)*

**LITHIUM ION**

LENGTH: 2" WIDTH: 1 1/2" HEIGHT: 3/4"

BATTERY CHARGER: *N/A*

BATTERY ELIMINATOR: *N/A*



CONTACT CONFIGURATION

**CAM-222, CAM-222-2 RCA/HITACHI - C, VMP-51, 52**



BATTERY PROFILE


- CAM-222** 12V, 1500MAH
- CAM-222-2** 12V, 2000MAH

**NI-CAD**

LENGTH: 4-1/4" WIDTH: 2-3/8" HEIGHT: 2"

BATTERY CHARGER: *CCA-V1012*

BATTERY ELIMINATOR: *N/A*

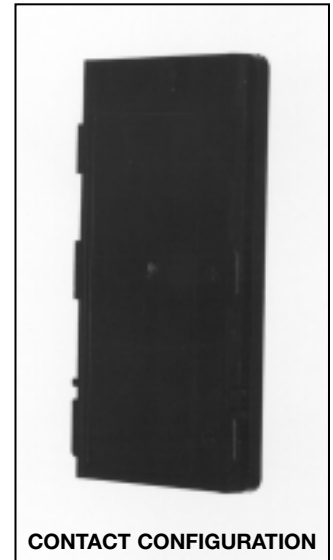

CONTACT CONFIGURATION

**CAM-252, CAM-252NMH SONY: NP-55, SHARP: BT-77**



BATTERY PROFILE


- CAM-252** 6V, 1200MAH  
*LOW PROFILE NI-CAD*

- CAM-252NMH** 6V, 2000MAH  
*LOW PROFILE NICKEL METAL HYDRIDE*

LENGTH: 3-1/2" WIDTH: 1-3/4" HEIGHT: 3/4"

BATTERY CHARGER: *CCA-412, CCA-415*

BATTERY ELIMINATOR: *CCA-522CC*

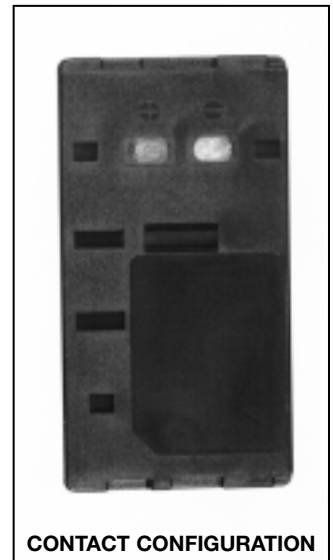

CONTACT CONFIGURATION